

VLT

V - S T E E L L - T R A C T I O N



MAIN FEATURES

- Designed for articulated dump trucks and front-end loaders
- Superior traction and manoeuvrability on soft, muddy terrain
- Self-cleaning and non-directional tread patterns
- High reliability, durability and long tread life

VLT

Tyre size	Star rating	TRA code
20.5R25	MS	E3/L3
23.5R25	MS	E3/L3
26.5R25	MS	E3/L3
29.5R25	MS	E3/L3
30.5R25 (750/65R25)	MS	E3/L3

BRIDGESTONE OFF-THE-ROAD TYRES

VLT V-STEEL L-TRACTION


VLT (V-steel L-Traction) off-the-road radial tyres are specially developed for earthmovers and front-end loaders operating on muddy surfaces. Unique tread design offers superb self-cleaning performance, assuring powerful traction on wet, soft, and muddy terrain.



Excellent traction and manoeuvrability


Ideal tread lug design contributes to obtain excellent manoeuvrability and traction on wet, soft and muddy terrain.

Tread design

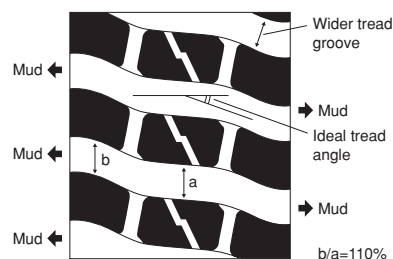

This lug design assures smooth mud rejection from the grooves.


Tread lug movement

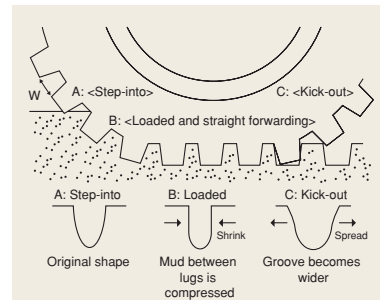

How is the mud ejected?

Catching the mud ⇒ Powerful traction ⇒ Easy ejection of mud

Ideal lug angle alignment realises the excellent traction.

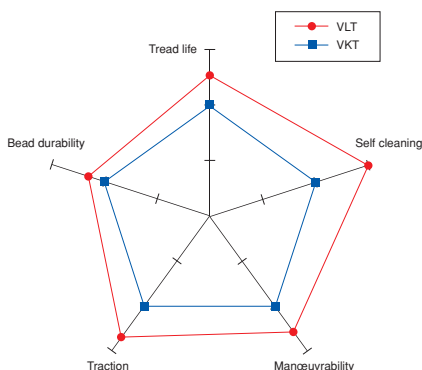

Tyre Size	Star Rating	Type	Recommended Rim/Flange Height	Approximate Inflated Dimensions								OTD
				OD		OW		SLR		SLW		
				inch	mm	inch	mm	inch	mm	inch	mm	
20.5R25	MS	T/L	17.00/2.0	58.9	1495	21.0	533	26.6	676	23.1	586	40.0
23.5R25	MS	T/L	19.50/2.5	64.1	1629	24.1	612	28.9	734	26.8	680	42.5
26.5R25	MS	T/L	22.00/3.0	69.1	1755	26.6	675	31.0	787	29.0	736	45.0
29.5R25	MS	T/L	25.00/3.5	74.1	1881	30.0	762	33.1	840	32.7	830	48.0
30/65R25 (750/65R25)	MS	T/L	24.00/3.0	64.0	1625	30.1	765	28.3	718	32.7	831	43.0

Note: MS: Multi-Star rating T/L: Tubeless type

Specifications are subject to change without notice.



Bridgestone Europe NV/SA
<http://www.bridgestone-eu.com>