

VSNT (E4/L4)

V - S T E E L N - T R A C T I O N

VSDT (L5)

V - S T E E L S U P E R - D E E P T R A C T I O N



MAIN FEATURES

- Excellent traction
- Superb side-cut resistance
- Better riding comfort
- Long tread life (L4/L5 tread class)

VSDT/VSNT

Tyre size	
VSNT (E4/L4)	VSDT (L5)
26.5R25	23.5R25
29.5R25	26.5R25
29.5R29	29.5R25
35/65R33	29.5R29
	35/65R33

BRIDGESTONE OFF-THE-ROAD TYRES

VSNT V-STEEL N TRACTION (E4/L4)

VSDT V-STEEL SUPER-DEEP TRACTION (L5)

Excellent traction

0% worn



Optimal lug angle achieves powerful traction for both tipping and drive-in/-out.


75% worn




Uniform groove depth ensures excellent traction throughout the life of the tyre.

Better riding comfort

Optimal lug face ensures equal load distribution and even contact area, providing virtually vibration-free driving on all surfaces (particularly on hard-packed or asphalt roads).

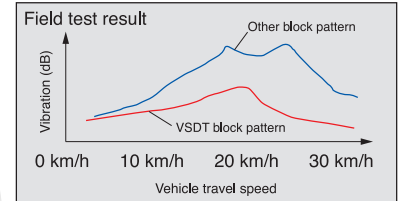

Superb side-cut resistance

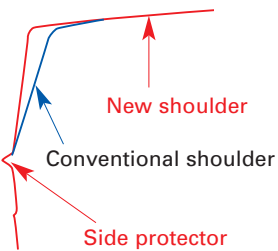


New square shoulder design pushes objects aside, protecting the side wall from cuts and damage.

Groove stone ejectors



Take a close look at the small nubs in the grooves of the VSDT/VSNT tyres. They push out stones trapped in the grooves, preventing them from drilling into the tyre.

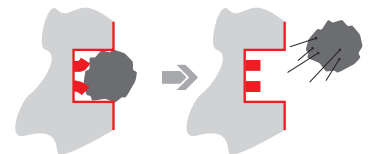

VSNT (E4/L4)

Tyre Size	Star Rating	Type	Recommended Rim/Fl height	Approximate Inflated Dimensions								
				OD		OW		SLR*		SLW*		OTD
				inch	mm	inch	mm	inch	mm	inch	mm	
26.5R25	MS	T/L	22.00/3.0	70.0	1779	26.8	680	31.5	799	29.1	740	57.5
29.5R25	MS	T/L	25.00/3.5	75.0	1905	30.2	768	33.4	849	32.9	835	60.0
29.5R29	MS	T/L	25.00/3.5	78.7	2000	30.5	774	35.6	905	34.6	849	60.0
35/65R33	MS	T/L	28.00/3.5	81.7	2075	35.6	904	36.9	936	38.4	976	62.5

VSDT (L5)

Tyre Size	Star Rating	Type	Recommended Rim/Fl height	Approximate Inflated Dimensions								
				OD		OW		SLR		SLW		OTD
				inch	mm	inch	mm	inch	mm	inch	mm	
23.5R25	*1/*2	T/L	19.50/2.5	65.4	1660	24.4	621	29.3	745	26.8	680	79.0
26.5R25	*1/*2	T/L	22.00/3.0	69.9	1775	27.4	697	31.1	790	30.6	778	88.0
29.5R25	*1/*2	T/L	25.00/3.5	74.7	1898	30.7	779	33.3	845	34.2	869	96.0
29.5R29	*1/*2	T/L	25.00/3.5	78.5	1993	30.5	774	34.8	883	34.3	872	96.0
35/65R33	*1	T/L	28.00/3.5	81.7	2075	35.0	890	36.0	914	39.0	990	96.0

T/L: Tubeless type *For earthmover use, please consult Bridgestone.

Specifications are subject to change without notice.

BRIDGESTONE

Bridgestone Europe NV/SA
<http://www.bridgestone-eu.com>