

VHS

V-STEEL HIGHWAY SERVICE CRANE TYRES



MAIN FEATURES

- Extra long life
- Even wearing
- Low noise
- High-speed durability
- Lighter tyre weight

VCH/VCHD

Tyre size

385/95R24 170E (14.00R24 *3)

385/95R25 170E (14.00R25 *3)

445/95R25 177E (16.00R25 *2)

505/95R25 183E (18.00R25 *2)

525/80R25 179E (20.5R25 *2)


BRIDGESTONE OFF-THE-ROAD TYRES

VHS V-STEEL HIGHWAY SERVICE

Variable pattern pitch

Closed Shoulder

The VHS radial tyres have been developed with Bridgestone's innovative technology to assure excellent highway performance.

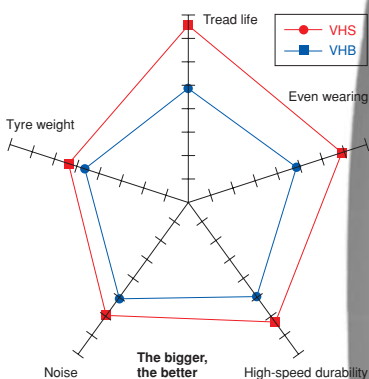

Low noise

Closed shoulder and variable pattern pitch reduce the noise level.

High speed durability

A new rubber coating applied to the steel cord ensures improved heat resistance.

Even wearing


Optimum casing design ensures even contact distribution which leads even wearing.

Use of new compound

The newly developed compound leads to a remarkable increase in life.

Lighter tyre weight

Bridgestone achieved lighter tyre weight without compromising tyre performance.

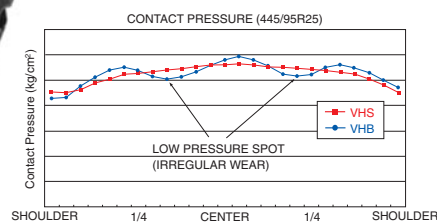

Tyre Size	Star Rating	Type	Recommended Rim/Flange Height (inch)	Approximate Inflated Dimensions								
				OD		OW		SLR		SLW		OTD
				inch	mm	inch	mm	inch	mm	inch	mm	mm
385/95R24 170E (14.00R24)	*3	T/T	10.00W	53.4	1356	15.0	382	24.6	626	16.6	421	23.0
385/95R25 170E (14.00R25)	*3	T/L	10.00/1.5	53.4	1356	15.0	382	24.6	626	16.6	422	23.0
445/95R25 177E (16.00R25)	*2	T/L	11.25/2.0	58.4	1484	17.1	435	26.9	684	18.9	480	25.5
505/95R25 183E (18.00R25)	*2	T/L	13.00/2.5	62.7	1593	19.9	505	28.6	727	22.2	565	26.0
525/80R25 179E (20.5R25)	*2	T/L	17.00/2.0	58.3	1480	21.0	533	26.7	677	22.8	578	31.0

Note: T/T: Tubed type T/L: Tubeless type

Specifications are subject to change without notice.



Bridgestone Europe NV/SA
<http://www.bridgestone-eu.com>